
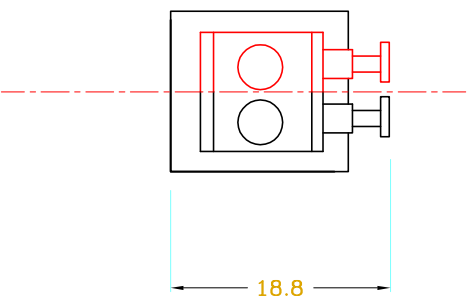


Version	Explains	Date
A		2015.10.17

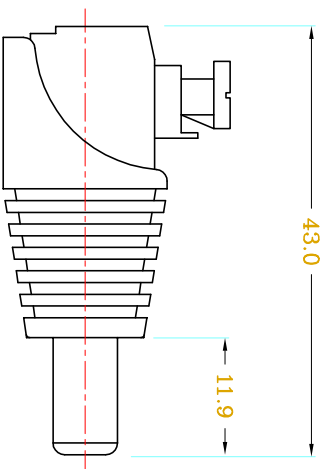

**Material**

Housing: 0A66 UL94V-0  
 Pin header: Brass, Tin-Plated  
 Screws: Steel. ZincPlated  
 Electrical  
 Rated Voltage: 300V  
 Rated current: 10A  
 Contact resistance: 20m Ω  
 Withstanding Voltage: 2000V/Min  
 Insulation Resistance: 5000m Ω/DC1000V  
 Mechanical&operating ambient  
 Wire Range : 26-14AWG  
 Strip length: 6-7mm  
 Temp. Range: -40° C/+105° C  
 AX soldering: +250° C 5Sec

general tolerance	CUSTOMER:	CUST NO:	
X	PRODUCT NO:	PART NO:	
X X	Adaptador tipo jack de 3.5 mm macho con terminales de presión	JR52X	
X XX			
X XXX	DRAWN BY	DRAWING SIZE	
	CHECKED BY	UNIT	mm
	APPROVED BY	PAGE	1 OF 1
	SORTING NO.		

